


# SUBMITTAL DATA SHEET

Irrigation & Booster Pumps  
 Superbooster | Centrifugal

## 84000 Series | Self-Priming Centrifugal Pumps



A.Y. McDonald 3 & 5 HP self-priming pumps are specially designed to be one of the fastest priming pumps on the market today. These pumps are well-suited for lawn sprinkling applications with a brass impeller, tapped for an air volume control and also includes a suction flange with a flapper valve to ensure priming.

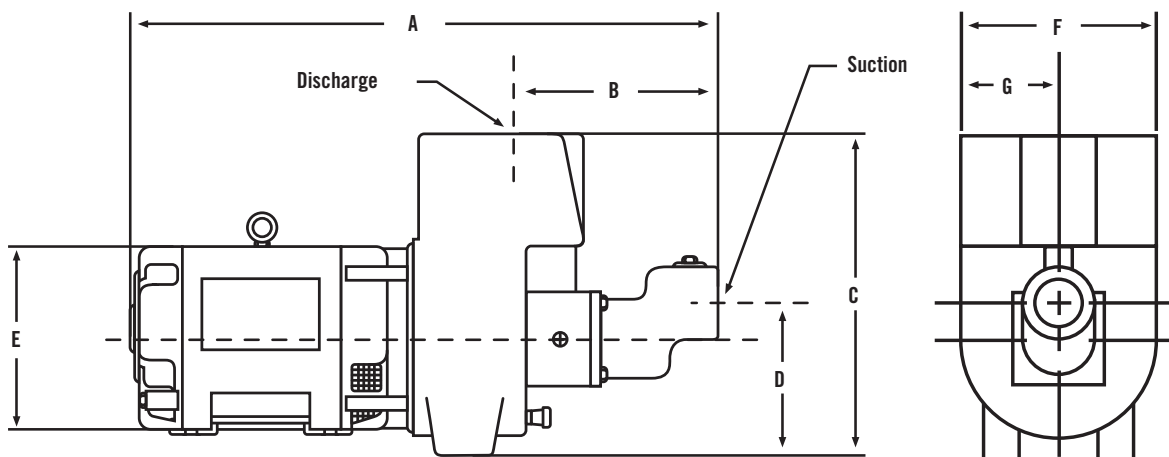

### Dimensional Information

Part No.	Model	HP	Voltage	Phase	Suction	Discharge	A	B	C	D	E	F	G	Lbs
6180-104	84300	3	230	1	2	1 1/2	25.50	7.44	13.25	6.50	9.38	9.25	4.75	144
6180-108	84300-3	3	208-230 / 460	3	2	1 1/2	23.50	7.44	13.25	6.69	7.19	9.25	4.75	144
6180-107	84500	5	230	1	2 1/2	2	27.25	8.44	13.25	7.44	8.56	9.25	4.75	182
6180-109	84500-3	5	208-230 / 460	3	2 1/2	2	25.75	8.44	13.25	7.44	9.38	9.25	4.75	182

### SUBMITTAL INFORMATION

- All Pumps Equipped with NEMA JM 3,500 RPM
- Single Phase 230 Volt or Three Phase 230 / 460 Volt
- Dual Ball Bearing

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



**A.Y. McDonald Mfg. Co.**  
 4800 Chavenelle Rd  
 Dubuque, IA 52002

**Toll Free: 1-800-292-2737**  
 sales@aymcdonald.com  
 aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by:


# SUBMITTAL DATA SHEET

Irrigation & Superbooster Pumps  
Superbooster | Centrifugal

## 84000 Series | Self-Priming Centrifugal Pumps



### Performance Curves

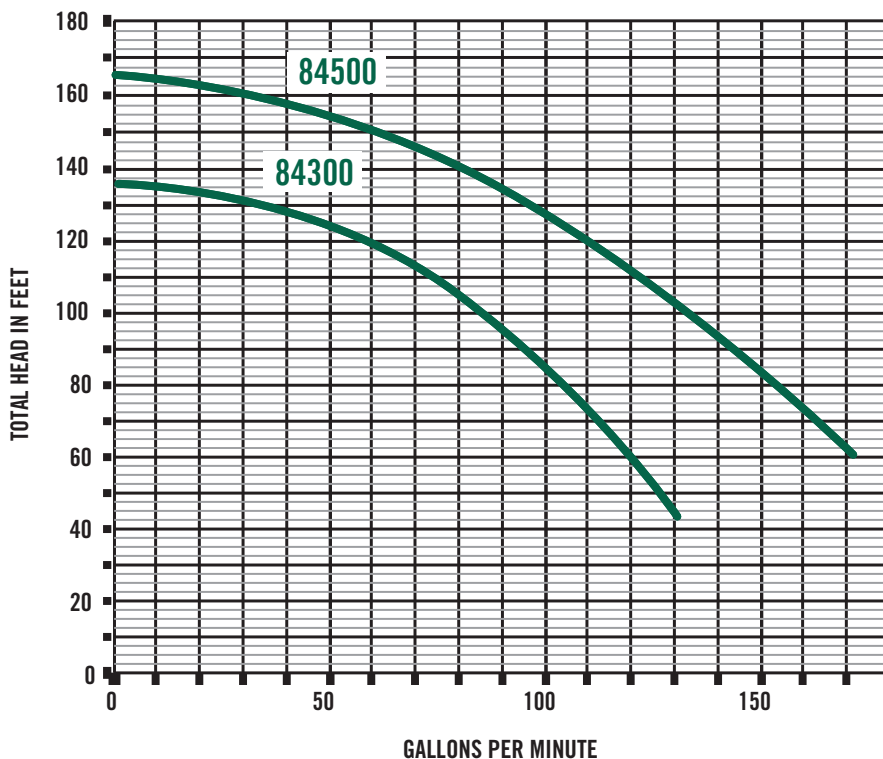

### Performance Data

Model	HP	Volts	Phase	NPT INCH		Discharge Head		Suction Lift in Feet					Weight Lbs	
				SUC	DIS	PSI	FEET	Capacity - U.S. Gallons per Minutes						
								5	10	15	20	25		
84300	3	230	1	2	1 1/2	20	46	123	120	108	98	70	144	
						30	69	108	105	98	94	68		
84300-3	3	230 / 460	3	2	1 1/2	40	92	87	82	76	70	62		182
						50	115	60	52	44	33	18		
84500	5	230	1	2 1/2	2	20	46	162	160	151	140	98	182	
						30	69	160	158	150	136	98		
84500-3	5	230 / 460	3	2 1/2	2	40	92	146	141	136	130	96		182
						50	115	118	115	104	94	94		

Specifications are subject to change without notice

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



**A.Y. McDonald Mfg. Co.**  
4800 Chavenelle Rd  
Dubuque, IA 52002

**Toll Free: 1-800-292-2737**  
sales@aymcdonald.com  
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: