


SUBMITTAL DATA SHEET

Iron Body Gas Ball Valves with Lockwing -8276 Series

FNPT x FNPT Union

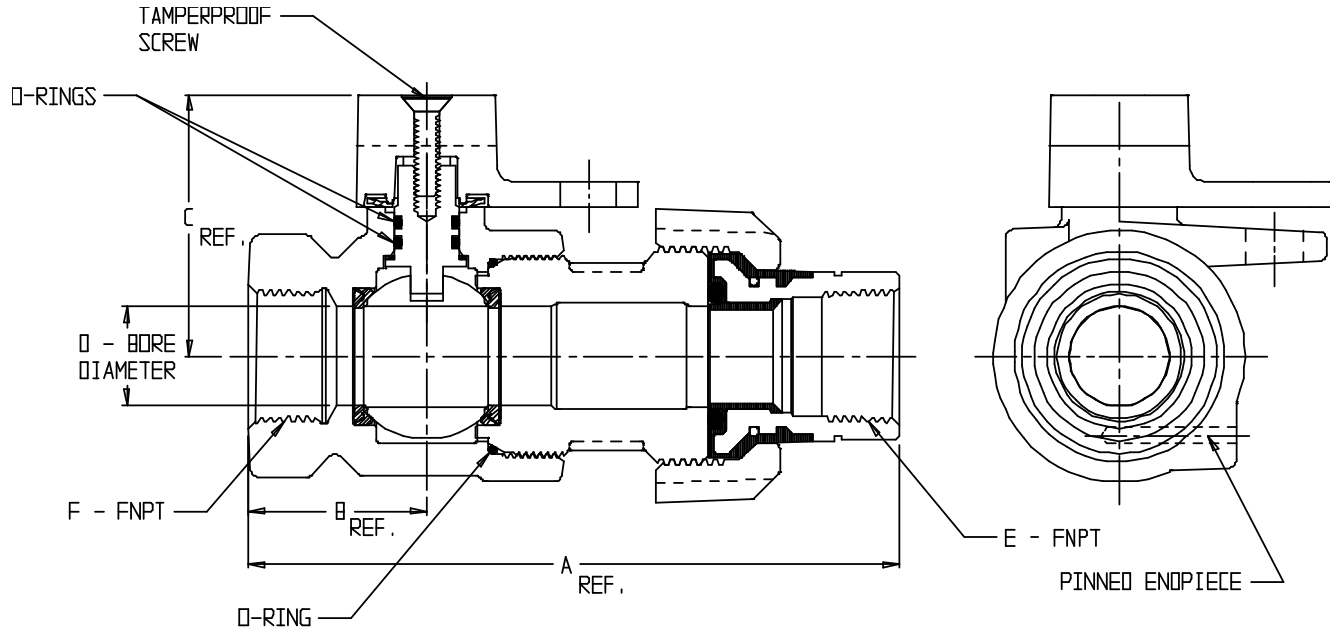

SIZE	A	B	C	D	E	F	WGT
3/4	5	1 3/8	1 13/16	3/4	3/4	3/4	2.5
1	5 13/16	1 11/16	2	1	1	1	3.4
1 1/4	7	1 7/8	2 1/2	1 1/4	1 1/4	1 1/4	5.7
2	6 15/16	2 7/16	3	2	2	2	12.5

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/ASME B16.33 (latest revision)
- Iron castings conform to ASTM A126 Class B Iron or Ductile Iron ASTM A536
- Optional Armorgalv® coating per ASTM A1059 (latest revision)
- UNS C36000 or CW617N brass ball rotates 360°
- Rated for 175 PSIG natural, manufactured, or LP gas pressure
- Blow out proof brass operating stem with two nitrile o-rings
- Tamper-resistant design prevents disassembly with normal household tools
- Full port opening sized to accommodate the best-known stop changers
- Lockwing design accommodates standard barrel locks
- Maintenance free design



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: