
SUBMITTAL DATA SHEET


Swing Connect Hinged Saddle - 3894





М	IODEL	SIZE	А	В	С	D	E
	3894	4X3/4	3/4	2.00	2.56	1.69	4.500
	3894	4 X I		2.00	2.56	1.69	4.500
	3894	6X3/4	3/4	2.00	2.56	1.69	6.625
	3894	6 X I		2.00	2.56	1.69	6.625
	3894	8X3/4	3/4	2.00	2.56	1.69	8,625
	3894	8 X I	I	2.00	2.56	1,69	8.625



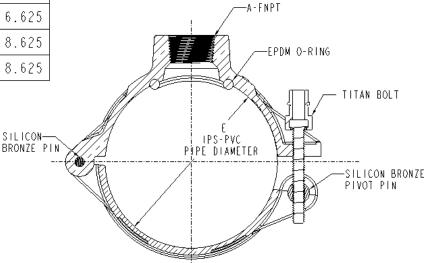

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5 (latest revision)
- Certified to NSF/ANSI 61
- Silicon Bronze hinge pin and bolt(s)
- EPDM o-ring
- Pipe and tap size, and thread type identified on saddle
- Outlet boss with large wrench flats



A.Y. McDonald Mfg. CO. 4800 Chavenelle Rd Dubuque, IA 52002

Toll Free: 1-800-292-2737 sales@aymcdonald.com

aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: 08-24