


SUBMITTAL DATA SHEET

Carbon Steel Press Fittings for Gas
Tees

Press x Press x Press



A.Y. McDonald Mfg. Co. Carbon Steel Press Fittings can be applied to Schedule 10 to 40 steel pipes meeting ASTM A53, A106, A135, and A795 standards and are compatible with a wide range of approved applications, including natural gas and propane. These fittings can be installed and connected with most of carbon steel pipes in residential, commercial, and industrial systems. This press system does not require gas shielded welding, brazing, and threading, so there is no fire hazard. Therefore, connecting gas pipe can be done safely and quickly.

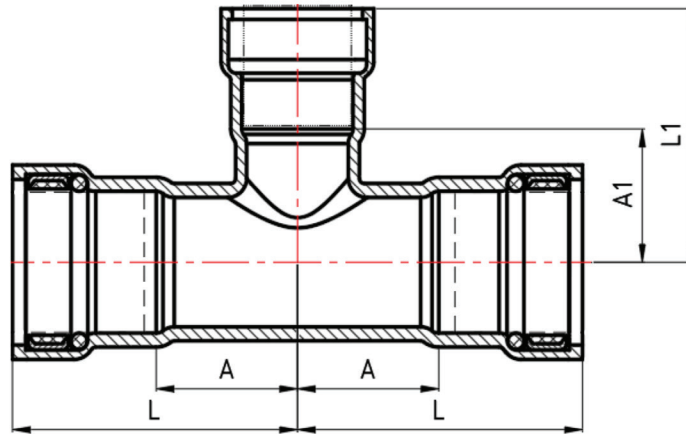

Dimensions

Part No.	Model No.	Size	L	L1	A	A1
4419-410	71900G	1/2"	2.04"	2.00"	0.97"	0.93"
4419-412	71900G	3/4"	2.26"	2.24"	1.11"	1.09"
4419-415	71900G	1"	2.57"	2.57"	1.23"	1.23"
4419-416	71900G	1 1/4"	3.23"	3.20"	1.41"	1.38"
4419-417	71900G	1 1/2"	3.44"	3.41"	1.57"	1.54"
4419-418	71900G	2"	3.80"	3.79"	1.81"	1.80"

Dimensions

Part No.	Model No.	Size	L	L1	A	A1
4419-411	71930G	3/4" x 1/2"	2.26"	2.14"	1.11"	1.07"
4419-413	71930G	1" x 1/2"	2.57"	2.28"	1.23"	1.20"
4419-414	71930G	1" x 3/4"	2.57"	2.40"	1.23"	1.24"

SUBMITTAL INFORMATION

- HNBR sealing element for fuels and gases
- Available sizes ranging from 1/2" to 2" in diameter
- Configurations include elbows, couplings, repair couplings (no stop), extended couplings (no stop), reducers, tees, adapters, unions, and caps
- Zinc nickel alloy coating with stronger corrosion-resistance
- Leak technology - a significant leakage will be identified at an unpressed fitting during the low pressure testing of the piping system
- The carbon steel press fittings are compatible RIDGID® (RP Series) and Milwaukee® (M18™) standard jaws



Non-Potable Use
Only



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by:

SUBMITTAL DATA SHEET

Carbon Steel Press Fittings for Gas
Tees

Press x Press x Press



Type of Service	System Operating Conditions			Sealing Element HNBR
	Comments	Pressure (PSI)	Temperature (°F)	
Fuel/Oil/Lubricant				
Mineral Oil		200	Ambient ²	✓
Lubricating Oil	Petroleum based		Max 149°F	✓
Propane		125	-40°F to 180°F	✓ ³
Butane				✓ ³
Natural Gas	Major component is methane			✓ ³
Heating Fuel Oil			Max 100°F	✓
Diesel Fuel				✓
Gas				
Compressed Air	Oil concentration ≤25 mg/m ³	200	Max 140°F	✓ ¹
	Oil concentration >25 mg/m ³			✓ ¹
Nitrogen				✓
Carbon Dioxide	Dry			✓
Argon Gas		✓		
Hydrogen		125	Max 140°F	✓
Acetylene	Test pressure 350 PSI	20	Ambient ²	✓
Vacuum	Minimum absolute pressure Maximum differential pressure	750µm Hg 29.2 Hg	Max 160°F	✓

1. The system must contain sufficient condensate drain.
2. The ambient temperature should be regarded as a normal working condition and should not exceed the limit of the sealing ring.
3. Complies with CSA 6.32/ANSI LC-4.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: