


# SUBMITTAL DATA SHEET

No-Lead Press Fit Fitting  
Repair Coupling – 71900RC

Press x Press

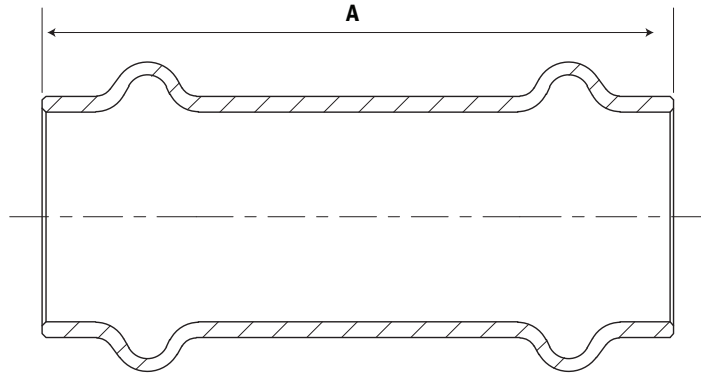

## Dimensions

Part No.	Model No.	Size	A	Weight (lbs.)	Ctn Qty	Mtr Qty
5419-032	71900RC	1/2"	1.61	.08	10	450
5419-033	71900RC	3/4"	1.97	.13	10	260
5419-034	71900RC	1"	1.97	.16	5	170
5419-035	71900RC	1 1/4"	2.20	.22	1	80
5419-036	71900RC	1 1/2"	2.99	.46	1	50
5419-037	71900RC	2"	3.27	.61	1	35
5419-243	71900RC	2 1/2"	3.54	1.08	1	32
5419-244	71900RC	3"	3.86	1.45	1	18
5419-245	71900RC	4"	4.49	2.42	1	12

## SUBMITTAL INFORMATION

- Available in sizes ranging from 1/2" to 2"
- All Press Fit fittings standards meet or exceed are No-Lead
- Patented leak detection technology allows for excellent visual indication of non-pressed joints prior to testing
- Compatible with multiple Press Fit tools for 2" and under
- EPDM O-ring
- Designed for hydrostatic water pressure up to 230 PSI (16 bar)
- Designed for temperature range of -4°F to 200°F (-20°C to 90°C)
- Press Fit fittings are suitable with ASTM B88 K, L, & M hard or soft copper tube.
- IAMPO PS 117 - 2012 ael / TiL-MSE-13 C2003
- Section 1417 (d) of the Safe Drinking Water Act
- ANSI/NSF 61-G, ANSI/NSF 372



NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



**A.Y. McDonald Mfg. Co.**  
4800 Chavenelle Rd  
Dubuque, IA 52002

**Toll Free: 1-800-292-2737**  
sales@aymcdonald.com  
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

**Submitted by:**