




# SUBMITTAL DATA SHEET

6", 8" & 10" Pump Ends  
90 - 1100 GPM Stainless Steel Pumps

## 650 GPM



A.Y. McDonald stainless steel pump ends offer peak capacity performance in its 650 gallons per minute (GPM). Each pump end includes cable guard, bolts, and washers. The 650 gallons per minute (GPM) is a 10" Stainless Steel Pump End that ranges in size from 15 to 125 horsepower (HP).

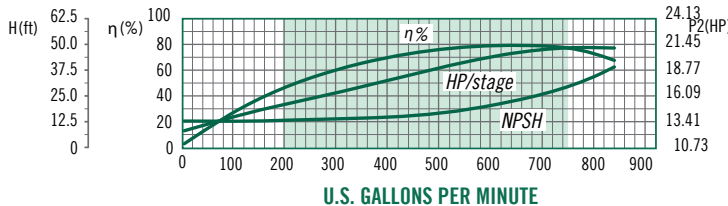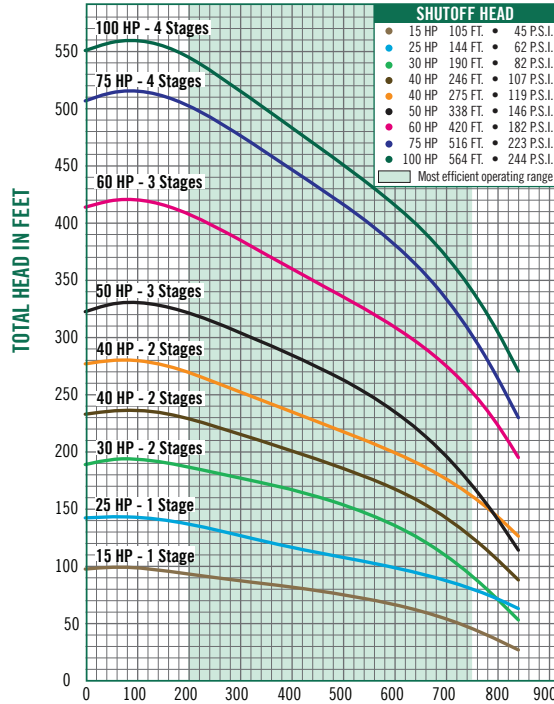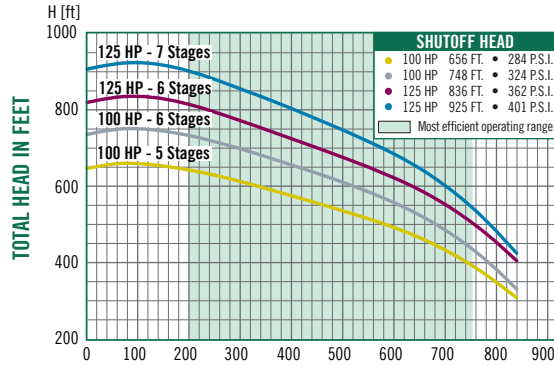

$\eta\%$  - Efficiency of motor

**NPSH** - Ft. of water above the pump

- FRICTION LOSSES IN RISER PIPE HAVE NOT BEEN CALCULATED
- CONTACT FACTORY FOR CAPACITIES NOT CATALOGED

**NO-LEAD:** The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



**A.Y. McDonald Mfg. Co.**  
4800 Chavenelle Rd  
Dubuque, IA 52002

**Toll Free: 1-800-292-2737**  
sales@aymcdonald.com  
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

**Submitted by:**

# SUBMITTAL DATA SHEET

6", 8" & 10" Pump Ends  
90 - 1100 GPM Stainless Steel Pumps

## 650 GPM




### Models Available

Part No.	Model No.	HP	Stages	Motor Size	Disch. Size	A	B	Wt.
6200-207	650S15HP106	15	1	6"	6"	25.7"	8.3"	64.5
6200-208	650S25HP106	25	1	6"	6"	25.7"	8.3"	64.8
6200-209	650S30HP106	30	2	6"	6"	31.8"	8.3"	78.9
6200-210	650S40HP106	40	2	6"	6"	31.8"	8.3"	78.9
6200-211	650S40HP106H	40	2	6"	6"	31.8"	8.3"	79.1
6200-212	650S50HP106	50	3	6"	6"	31.8"	8.4"	93.0
6200-213	650S60HP106	60	3	6"	6"	37.9"	8.3"	93.5
6200-244	650S60HP108	60	3	8"	6"	37.9"	8.3"	105.0
6200-214	650S75HP108H	75	4	8"	6"	44.0"	8.4"	114.9
6200-215	650S100HP108	100	4	8"	6"	44.0"	8.4"	115.1
6200-216	650S100HP108H	100	5	8"	6"	50.2"	8.4"	126.0
6200-217	650S100HP108SH	100	6	8"	6"	56.3"	8.4"	136.8
6200-218	650S125HP108H	125	6	8"	6"	56.3"	8.4"	137.2
6200-219	650S125HP108SH	125	7	8"	6"	62.4"	8.4"	148.1

Component	Materials	Standard
Discharge	Stainless Steel	304
Valve Cone	Stainless Steel	304
Valve Seat	Stainless Steel / Rubber	304 / NBR
Top Diffuser	Stainless Steel	304
Upper Bearing	Stainless Steel / Rubber	304 / NBR
Neck Ring	Stainless Steel / Rubber	304 / NBR
Bottom Neck Ring	PTFE + CF	
Bearing	Rubber	NBR
Diffuser	Stainless Steel	304
Split Cone Nut	Stainless Steel	304
Nut for Stop Ring	Stainless Steel	304
Split Cone	Stainless Steel	304
Ring of Impeller	Stainless Steel	304
Impeller	Stainless Steel	304
Bottom Diffuser	Stainless Steel	304
Lower Bearing	Stainless Steel / Rubber	304 / NBR
Stop Ring	Stainless Steel	304
Spacing Washer for Stop Ring	PTFE / CF	
Strainer	Stainless Steel	304
Suction Interconnector	Stainless Steel	304
Pump Shaft	Stainless Steel	431
Coupling	Stainless Steel	304
Strap	Stainless Steel	304
Nut	Stainless Steel	304
Cable Guard	Stainless Steel	304
Strainer Cap	Stainless Steel	304

Pump end discharge  
6" FNPT

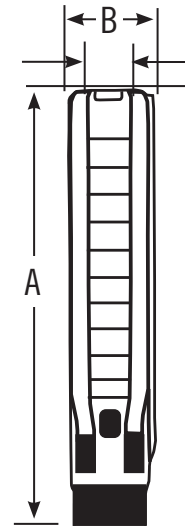

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



**A.Y. McDonald Mfg. Co.**  
4800 Chavenelle Rd  
Dubuque, IA 52002

**Toll Free: 1-800-292-2737**  
sales@aymcdonald.com  
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

**Submitted by:**