


SUBMITTAL DATA SHEET


No-Lead
Female Street Adapter – 71900FSA

FNPT x Fitting

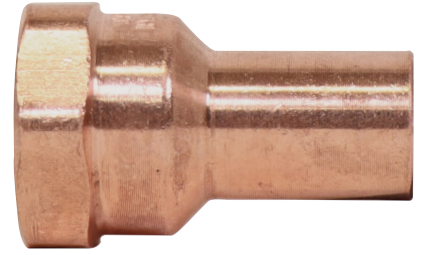

Dimensions

Model No.	Size	A	Weight (lbs)	Ctn Qty	Mtr Qty
71900FSA	1/2"	1.59"	.09	5	250
71900FSA	3/4"	1.90"	.15	5	150
71900FSA	1"	1.96"	.23	1	110
71900FSA	1 1/4"	2.17"	.32	1	100
71900FSA	1 1/2"	2.63"	.49	1	55
71900FSA	2"	2.84"	.75	1	40

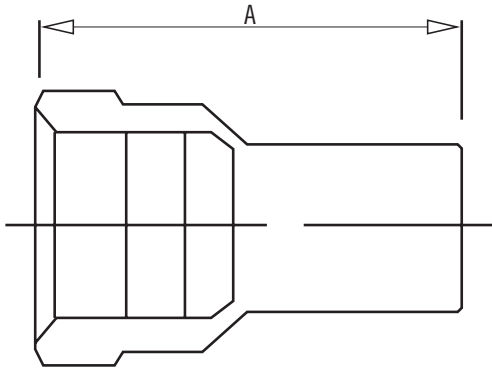

Dimensions - Reducing Street Adapter

Model No.	Size	A	Weight (lbs)	Ctn Qty	Mtr Qty
71900FSA	1/2" x 3/4"	1.87"	.15	5	160
71900FSA	3/4" x 1/2"	1.81"	.15	5	160
71900FSA	1" x 3/4"	1.85"	.15	5	250

SUBMITTAL INFORMATION

- Available in sizes ranging from 1/2" to 2"
- Patented leak detection technology allows for excellent visual indication of non-pressed joints prior to testing
- Compatible with multiple Press Fit tools for 2" and under
- EPDM O-ring
- Designed for hydrostatic water pressure up to 230 PSI
- Designed for temperature range of -4°F to 200°F
- Press Fit fittings are suitable with ASTM B88 K, L, & M hard or soft copper tube.
- IAMPO PS 117 - 2012 ael / TiL-MSE-13 C2003
- Section 1417 (d) of the Safe Drinking Water Act
- ANSI/NSF 61-G, ANSI/NSF 372



NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: