

# SUBMITTAL DATA SHEET

No-Lead Press Fit  
Adapter – 71900F & 71900M



Press Fit x FNPT or Press Fit x MNPT



71900F



71900M

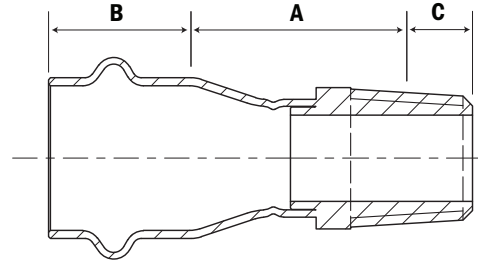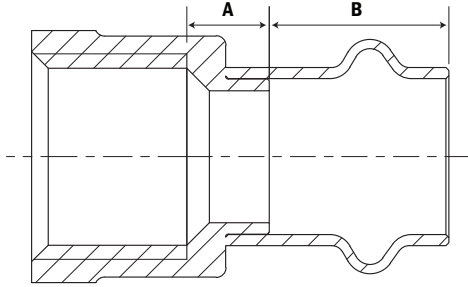

## Dimensions - Press x FNPT

Model No.	Size	A	B	Weight (Oz)	Ctn Qty	Mtr Qty
71900F	1/2"	0.33	0.74	2.47	5	130
71900F	3/4"	0.41	0.91	3.88	5	100
71900F	1"	0.35	0.91	5.64	5	60
71900F	1 1/4"	0.39	1.02	8.46	5	40
71900F	1 1/2"	0.51	1.42	13.05	1	15
71900F	2"	0.51	1.57	17.99	1	12
71900F	1/2" x 3/4"	1.03	0.72	90	5	130
71900F	3/4" x 1/2"	1.03	0.87		5	130
71900F	1" x 3/4"	1	0.87	113	5	80
71900F	1 1/4" x 1"	1.04	1	176	5	50
71900F	1 1/2" x 1 1/4"	0.39	1.42	263	1	15

## Dimensions - Press x MNPT

Model No.	Size	A	B	C	Weight (Oz)	Ctn Qty	Mtr Qty
71900M	1/2"	0.722	0.748	0.39	2	5	150
71900M	3/4"	0.866	0.905	0.40	3.35	5	60
71900M	1"	0.944	0.905	0.51	4.46	5	60
71900M	1 1/4"	1.06	1.417	0.53	8.64	5	40
71900M	1 1/2"	1.10	1.417	0.55	12	1	20
71900M	2"	1.18	1.57	0.58	18	1	10
71900M	1/2" x 3/4"	1.48	0.905	0.40	3.70	5	60
71900M	3/4" x 1/2"	1.34	0.748	0.39	3.13	5	130
71900M	1" x 3/4"	1.46	0.905	0.40	4.41	5	80
71900M	1" x 1 1/4"	1.79	1.417	0.53	8.18	5	80
71900M	1 1/4" x 1"	1.76	0.905	0.51	6.00	5	50
71900M	1 1/4" x 1 1/2"	1.87	1.417	0.55	10.97	1	20
71900M	1 1/2" x 1 1/4"	1.06	1.417	0.53	10.33	1	20

## SUBMITTAL INFORMATION

- Patented leak detection technology allows for excellent visual indication of non-pressed joints prior to testing
- Compatible with multiple Press Fit tools for 2" and under
- EPDM O-ring
- Designed for hydrostatic water pressure up to 230 PSI (16 bar)
- Designed for temperature range of -4°F to 200°F
- Press Fit fittings are suitable with ASTM B88 K, L, & M hard or soft copper tube
- IAMPO PS 117 - 2012 ael / TiL-MSE-13 C2003
- Section 1417 (d) of the Safe Drinking Water Act
- ANSI/NSF 61-G, ANSI/NSF 372



NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



**A.Y. McDonald Mfg. Co.**  
4800 Chavenelle Rd  
Dubuque, IA 52002

**Toll Free: 1-800-292-2737**  
sales@aymcdonald.com  
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: