


SUBMITTAL DATA SHEET

No-Lead
Brass Drop Ear Elbow – 71990F

CTS (Press Fit) x FNPT



A.Y. McDonald Mfg. Co. No-Lead Drop Ear Elbows creates a 90° connection and allows the transition from Pex tubing to threaded pipe. Drop ear elbows are secured to a stud behind the wall, using the mounting 'ears' which have holes in them. Typically used for installing shower arms and tub spouts, and for use in potable water applications.

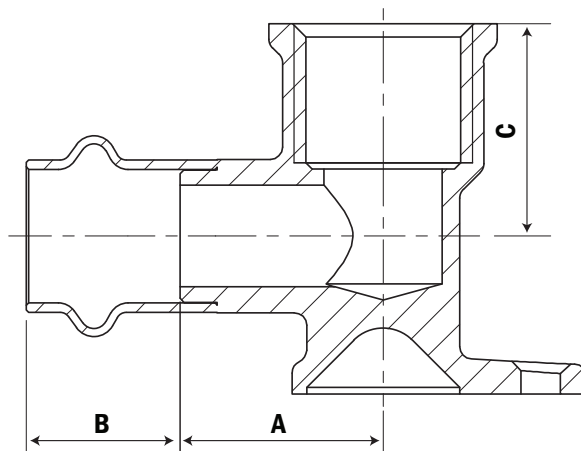

Dimensions

Model No.	Size	A	B	C
71990F	1/2" x 1/2"	0.94	0.94	1.00
71990F	3/4" x 3/4"	1.12	0.91	1.26

SUBMITTAL INFORMATION

- Sizes Available: 1/2" and 3/4"
- EPDM O-ring
- Designed for hydrostatic water pressure up to 230 PSI
- Designed for temperature range of -4°F to 200°F
- Press Fit fittings are suitable with ASTM B88 K, L, & M hard or soft copper tube.
- IAMPO PS 117 - 2012 ael / TiL-MSE-13 C2003
- Section 1417 (d) of the Safe Drinking Water Act
- ANSI/NSF 61-G, ANSI/NSF 372



NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: