


SUBMITTAL DATA SHEET

No-Lead Press Fit
90° Elbow – 71990

Press Fit x Press Fit

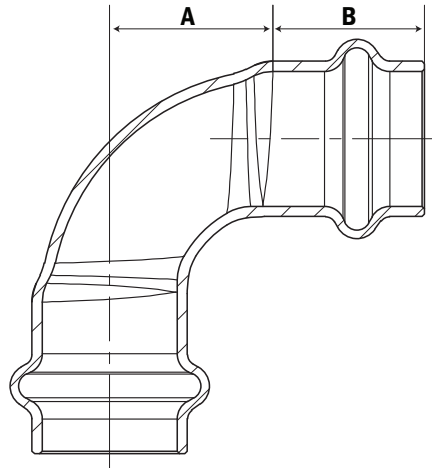

Dimensions

Model No.	Size	A	B	Weight (Oz)	Ctn Qty	Mtr Qty
71990	1/2"	0.72"	0.76"	1.76	10	150
71990	3/4"	1.04"	0.91"	3.35	10	150
71990	1"	1.32"	0.91"	4.3	5	80
71990	1 1/4"	1.65"	1.02"	6.45	5	25
71990	1 1/2"	2.00"	1.42"	11.21	5	25
71990	2"	2.62"	1.57"	17.63	1	15

SUBMITTAL INFORMATION

- Patented leak detection technology allows for excellent visual indication of non-pressed joints prior to testing
- Compatible with multiple Press Fit tools for 2" and under
- EPDM O-ring
- Designed for hydrostatic water pressure up to 230 PSI (16 bar)
- Designed for temperature range of -4°F to 200°F
- Press Fit fittings are suitable with ASTM B88 K, L, & M hard or soft copper tube
- IAMPO PS 117 - 2012 ael / TiL-MSE-13 C2003
- Section 1417 (d) of the Safe Drinking Water Act
- ANSI/NSF 61-G, ANSI/NSF 372



NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: