


SUBMITTAL DATA SHEET

No-Lead
Drop Ear Elbow – 72101Q

FNPT x CTS (Push-Fit)



A.Y. McDonald Mfg. Co. No-Lead Drop Ear Elbows creates a 90° connection and allows the transition from Pex tubing to threaded pipe. Drop ear elbows are secured to a stud behind the wall, using the mounting 'ears' which have holes in them. Typically used for installing shower arms and tub spouts, and for use in potable water applications.

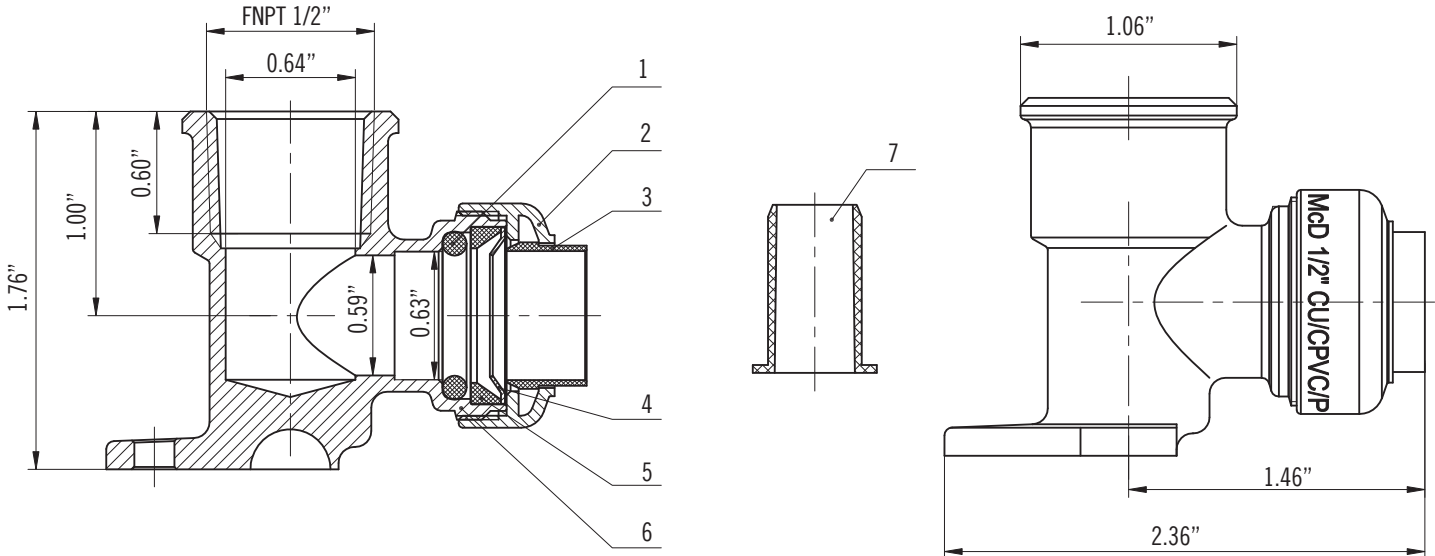

Materials

No.	Part	Material
1	O-ring	EPDM
2	Nut	Brass (C37700)
3	Release Collar	Polyoxymethylene (POM)
4	Grab Ring	SS316L
5	Protector	Polyoxymethylene (POM)
6	Elbow Drop Ear	Brass (C46500)
7	Insert	Polysulfone (PSF)

SUBMITTAL INFORMATION

- Three Ear Design
- Max Working Pressure: 200 PSI
- Temperature Range: 0°F to 200°F

- Use with:
 - Pex tubing in accordance with ASTM F-876 and F-877
 - Copper tubing in accordance with ASTM B88
 - CPVC tubing in accordance with ASTM D2846/2846M-99

- Certified to meet ASSE 1061



NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: