




SUBMITTAL DATA SHEET

No-Lead
Brass Pex Combo Adapter - 72300SFM

Pex x Male Coupling or Female Sweat



| Pipe Size | 3/8" | 1/2" | 5/8" | 3/4" | 1" | 1 1/4" |
|-------------|------|------|------|------|--------|--------|
| Actual O.D. | 1/2" | 5/8" | 3/4" | 7/8" | 1 1/8" | 1 3/8" |

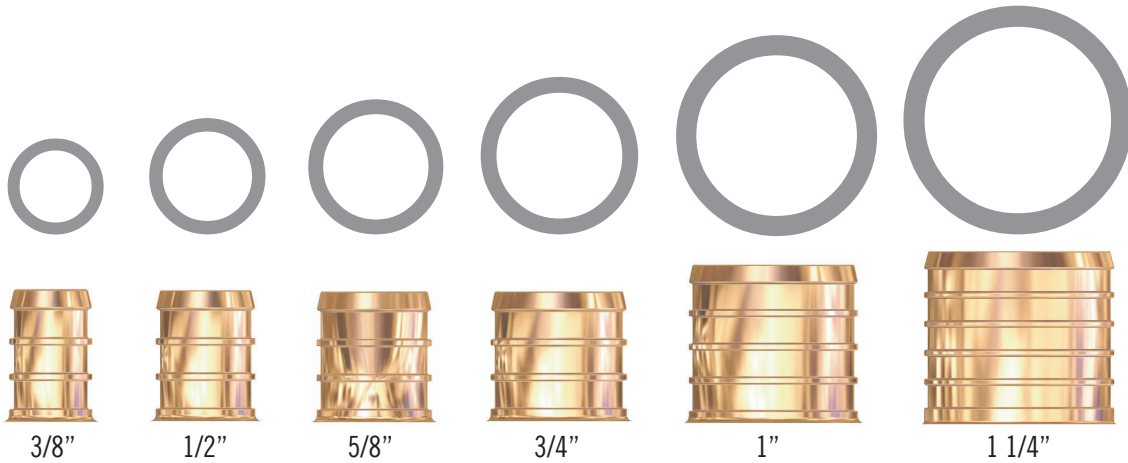

SUBMITTAL INFORMATION

- **Pressure Rating:** 150 PSI
- **Material:** Forged No-Lead Brass (C69300)
- Pex end conforms to ASTM F1807
- **Use with:** Pex tubing in accordance with ASTM F876 & F877
- Complies with NSF/ANSI 61-2012
- **Typical Applications:** Potable code and hot domestic water, hydronic heating systems and radiant heating systems



NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: