

SUBMITTAL DATA SHEET

NL Ball Style Meter Stop – 74652B

Copper Flare x Meter Swivel Nut

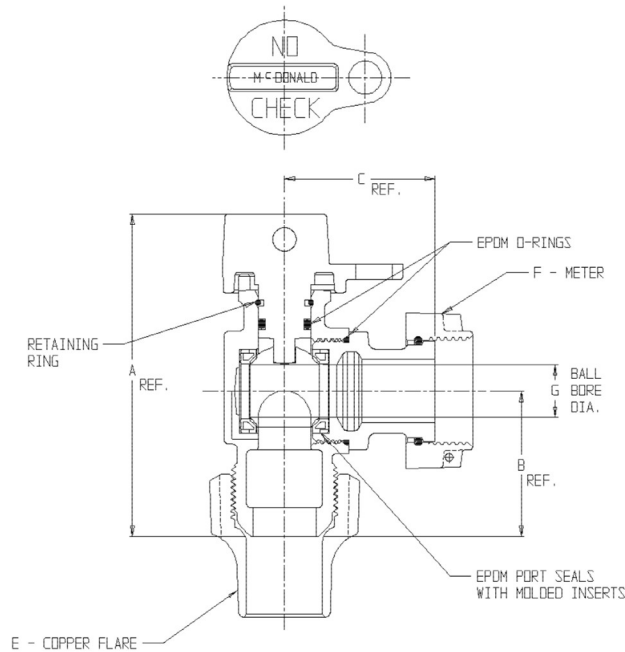


PLATE NO.	SIZE	A	B	C	D	E	F	G
74652B	5/8	3.86	1.74	1.78	.63	3/4	5/8	.62
74652B	1 X 5/8	4.00	1.88	1.78	.63	1	5/8	.62
74652B	3/4	3.86	1.74	1.80	.63	3/4	5/8 X 3/4 DR 3/4	.62
74652B	1 X 3/4	4.00	1.88	1.80	.63	1	5/8 X 3/4 DR 3/4	.62
74652B	1	4.81	2.39	1.90	.75	1	1	.75

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with “NL”
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- PTFE coated brass ball
- Valve rated for 300 PSIG water pressure, end connections not to exceed rated pipe pressures.
- Blow out proof EPDM port seals
- End piece joint sealed with an EPDM o-ring and thread locker



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: