


SUBMITTAL DATA SHEET

NL Plug Style Corporation Stop – 74701G



AWWA/CC x G CTS Compression



RIB INDICATES FLOW DIRECTION

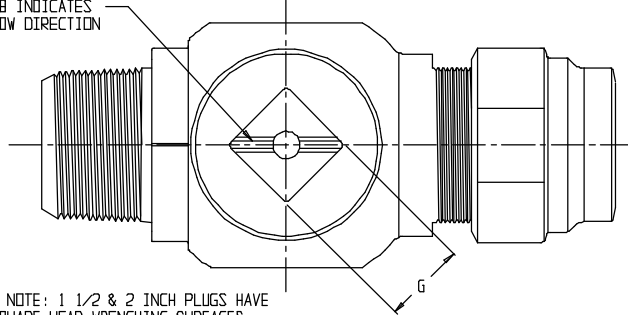

* NOTE: 1 1/2 & 2 INCH PLUGS HAVE SQUARE HEAD WRENCHING SURFACES

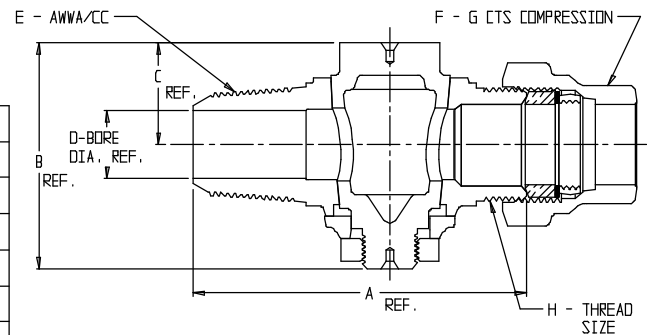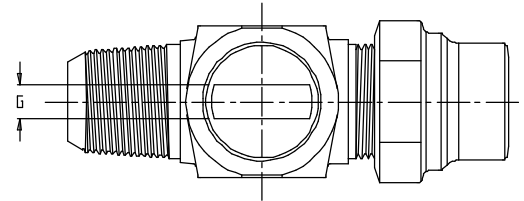

MODEL NO.	SIZE	A	B	C	D	E	F	G	H
74701G	5/8 X 3/4	3.50	2.33	1.10	.63	5/8	3/4	.34	3/4 AWWA FLARE
74701G	3/4	3.66	2.50	1.13	.75	3/4	3/4	.38	3/4 AWWA FLARE
74701G	3/4 X 1	3.87	2.50	1.13	.75	3/4	1	.38	1 AWWA FLARE
74701G	1	4.25	2.89	1.41	1.00	1	1	.38	1 AWWA FLARE
74701G	1 1/4	5.31	3.44	1.67	1.25	1 1/4	1 1/4	.44	1 1/4 AWWA FLARE
74701G	1 1/2	6.06	3.35	2.00	1.50	1 1/2	1 1/2	1.13*	2 1/8 - 16 SPECIAL
74701G	2	7.30	4.82	2.41	2.00	2	2	1.25*	2 5/8 - 16 SPECIAL
74701GFT	1 1/2	6.23	3.35	2.00	1.50	1 1/2	1 1/2	1.13*	1 1/2 AWWA FLARE
74701GFT	2	7.30	4.82	2.41	2.00	2	2	1.25*	2 AWWA FLARE

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- Large wrench flats provided for proper installation
- Plug rotates 360°
- 1/2" – 1" rated for 100 PSIG water pressure
- 1 1/4" – 2" rated for 80 PSIG water pressure
- Insert stiffeners required on all flexible plastic connections



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: