
## SUBMITTAL DATA SHEET

NL Service Fitting – 74755DB-22



-22 CTS Compression x Female Copper Flare with Dielectric Bushing

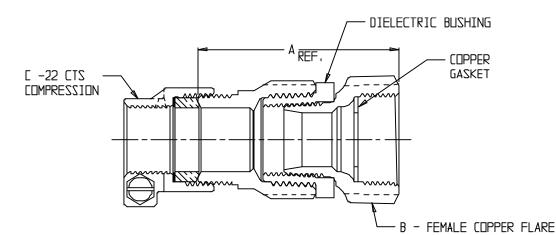

NDTE: ACTUAL LENGTHS WILL VARY DUE TO ASSEMBLY DF INSULATOR.

MODEL	SIZE	A	В	С
74755DB-22	3⁄4	2.80	3⁄4	3⁄4
7475508-22	1	3,35	1	l
74755DB-22	l 1/2	5,40	1 1/2	1 1/2
74755DB-22	2	6.55	2	2

## SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- Large wrench flats provided for proper installation
- Insert stiffeners required on all flexible plastic connections



**A.Y. McDonald Mfg. Co.** 4800 Chavenelle Rd Dubuque, IA 52002 **Toll Free:** 1-800-292-2737 sales@aymcdonald.com <u>aymcdonald.com</u>

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

## Submitted by: