


# SUBMITTAL DATA SHEET

## NL Ball Style Meter Stop – 76102WYG

G CTS Compression x Yoke Star Nut

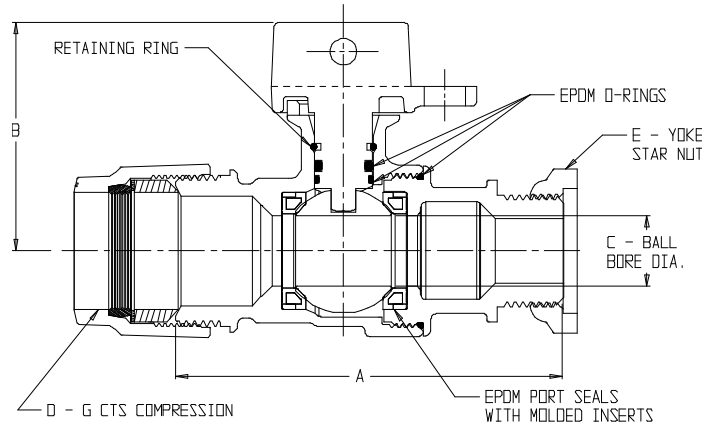

MODEL NO.	SIZE	A	B	C	D	E
76102WYG	3/4 X 5/8 X 01	3.22	2.31	.63	3/4	5/8
76102WYG	3/4 X 3/4 X 01	4.04	2.42	.75	3/4	5/8
76102WYG	1 X 3/4 X 01	4.08	2.42	.75	1	5/8
76102WYG	3/4 X 5/8 X 02	3.22	2.31	.63	3/4	5/8 X 3/4, 3/4
76102WYG	3/4 X 3/4 X 02	4.04	2.42	.75	3/4	5/8 X 3/4, 3/4
76102WYG	1 X 3/4 X 02	4.08	2.42	.75	1	5/8 X 3/4, 3/4
76102WYG	1 X 3/4 X 04	3.90	2.42	.75	1	1
76102WYG	1 X 1 X 04	4.27	2.64	1.00	1	1
76102WYG	1 1/4 X 1 X 04	4.69	2.64	1.00	1 1/4	1

### SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- PTFE coated brass ball
- Valve rated for 300 PSIG water pressure, end connections not to exceed rated pipe pressures.
- Blow out proof EPDM port seals
- End piece joint sealed with an EPDM o-ring and thread locker
- Insert stiffeners required on all flexible plastic connections



**A.Y. McDonald Mfg. Co.**  
4800 Chavenelle Rd  
Dubuque, IA 52002

**Toll Free: 1-800-292-2737**  
sales@aymcdonald.com  
[aymcdonald.com](http://aymcdonald.com)

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

**Submitted by:**