


SUBMITTAL DATA SHEET



NL Service Fitting – 74742G
Special Purpose x G CTS Compression

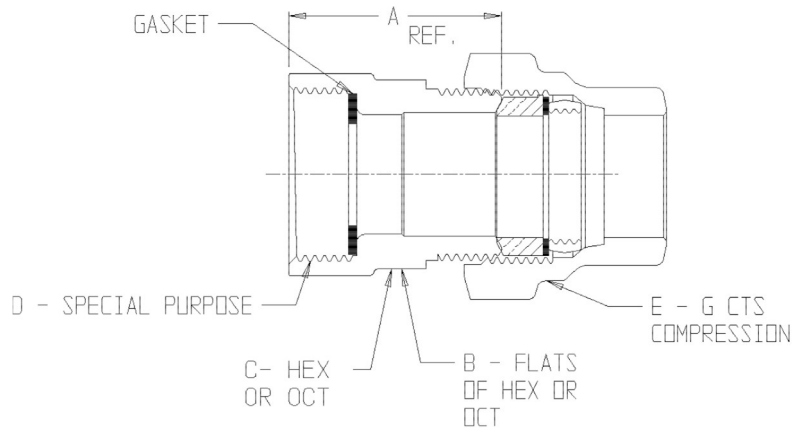

| MODEL | SIZE | A | B | C | D | E |
|--------|-----------|------|------|-----|-----|-----|
| 74742G | 1/2 X 3/4 | 1.51 | 1.38 | HEX | 1/2 | 3/4 |
| 74742G | 5/8 X 3/4 | 1.56 | 1.48 | HEX | 5/8 | 3/4 |
| 74742G | 5/8 X 1 | 1.32 | 1.63 | OCT | 5/8 | 1 |
| 74742G | 3/4 | 1.54 | 1.31 | HEX | 3/4 | 3/4 |
| 74742G | 3/4 X 1 | 1.68 | 1.50 | OCT | 3/4 | 1 |
| 74742G | 1 | 1.54 | 1.75 | HEX | 1 | 1 |
| 74742G | 1 X 3/4 | 1.81 | 2.13 | HEX | 1 | 3/4 |

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with “NL”
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- Large wrench flats provided for proper installation
- Insert stiffeners required on all flexible plastic connections



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: