
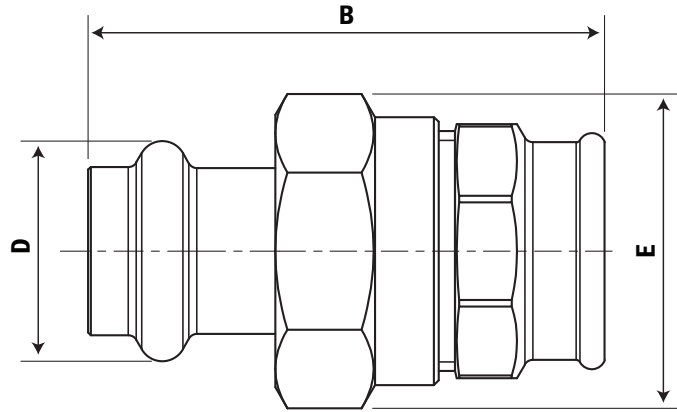


# SUBMITTAL DATA SHEET

No-Lead  
 Female Union – 71920F  
 CTS (Press Fit) x FNPT

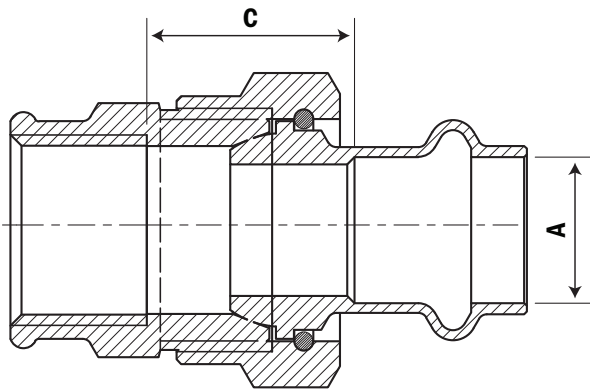

## Dimensions

Part No.	Model No.	Size	A	B	C	D	E
5419-127	71920F	1/2"	0.63	2.24	0.91	0.96	1.36
5419-128	71920F	3/4"	0.89	2.44	0.91	1.29	1.68
5419-129	71920F	1"	1.14	2.83	0.83	1.50	2.09
5419-130	71920F	1 1/4"	1.39	3.01	1.20	1.75	2.41
5419-131	71920F	1 1/2"	1.65	3.86	1.69	2.10	2.90

## SUBMITTAL INFORMATION

- Available Sizes: 1/2" - 1 1/2"
- Compatible with multiple Press Fit tools for 2" and under
- EPDM O-ring
- Designed for hydrostatic water pressure up to 230 PSI
- Designed for temperature range of -4°F to 200°F
- Press Fit fittings are suitable with ASTM B88 K, L, & M hard or soft copper tube.
- IAMPO PS 117 - 2012 ael / TiL-MSE-13 C2003
- Section 1417 (d) of the Safe Drinking Water Act
- ANSI/NSF 61-G, ANSI/NSF 372



NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



**A.Y. McDonald Mfg. Co.**  
 4800 Chavenelle Rd  
 Dubuque, IA 52002

**Toll Free: 1-800-292-2737**  
 sales@aymcdonald.com  
 aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

**Submitted by:**