


SUBMITTAL DATA SHEET

No-Lead
Male Union – 71920M
CTS (Press Fit) x MNPT

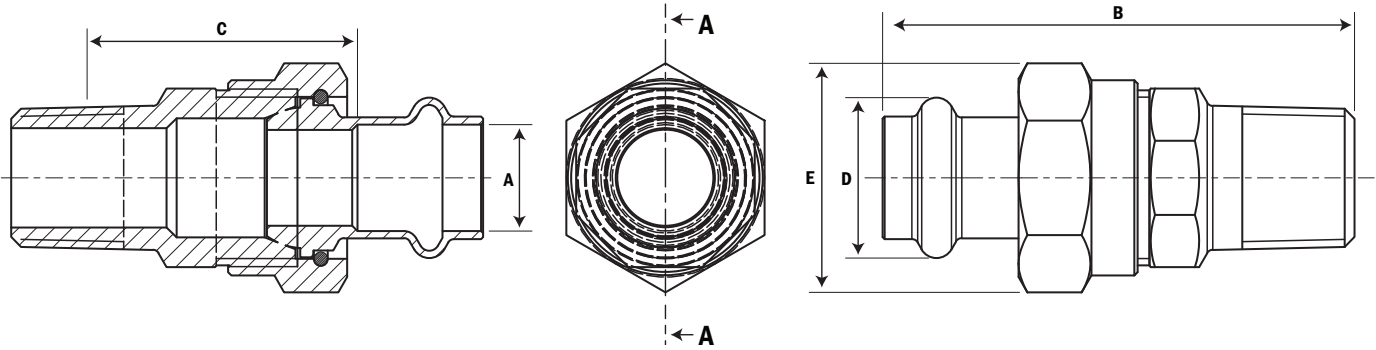

Dimensions

Part No.	Model No.	Size	A	B	C	D	E
5419-133	71920M	1/2" x 1/2"	0.63	2.81	1.67	0.96	1.36
5419-134	71920M	3/4" x 3/4"	0.89	3.03	1.77	1.29	1.68
5419-135	71920M	1" X 1"	1.14	3.78	2.28	1.50	2.09
5419-136	71920M	1 1/4" x 1 1/4"	1.39	3.78	2.20	1.75	2.41
5419-137	71920M	1 1/2" x 1 1/2"	1.65	4.72	2.87	2.10	2.90
5419-138	71920M	2" x 2"	2.15	4.80	2.56	2.57	3.25

SUBMITTAL INFORMATION

- Available in sizes ranging from 1/2" to 2"
- Patented leak detection technology allows for excellent visual indication of non-pressed joints prior to testing
- Compatible with multiple Press Fit tools for 2" and under
- EPDM O-ring
- Designed for hydrostatic water pressure up to 230 PSI
- Designed for temperature range of -4°F to 200°F
- Press Fit fittings are suitable with ASTM B88 K, L, & M hard or soft copper tube.
- IAMPO PS 117 - 2012 ael / TiL-MSE-13 C2003
- Section 1417 (d) of the Safe Drinking Water Act
- ANSI/NSF 61-G, ANSI/NSF 372



NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: