
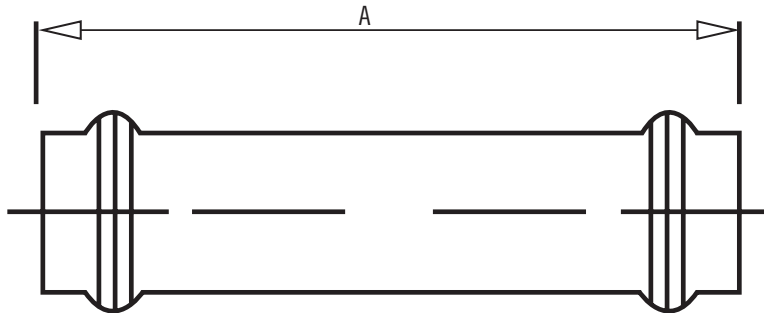


# SUBMITTAL DATA SHEET

No-Lead  
 Extending Coupling – 71900EC  
 CTS (Press Fit) x CTS (Press Fit)



## Dimensions

Part No.	Model No.	Size	A
5419-237	71900EC	1/2"	2.95"
5419-238	71900EC	3/4"	3.35"
5419-239	71900EC	1"	3.74"

## SUBMITTAL INFORMATION

- Available sizes: 1/2", 3/4" and 1"
- Patented leak detection technology allows for excellent visual indication of non-pressed joints prior to testing
- Compatible with multiple Press Fit tools for 2" and under
- EPDM O-ring
- Designed for hydrostatic water pressure up to 230 PSI
- Designed for temperature range of -4°F to 200°F
- Press Fit fittings are suitable with ASTM B88 K, L, & M hard or soft copper tube.
- IAMPO PS 117 - 2012 ael / TiL-MSE-13 C2003
- Section 1417 (d) of the Safe Drinking Water Act
- ANSI/NSF 61-G, ANSI/NSF 372



NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



**A.Y. McDonald Mfg. Co.**  
 4800 Chavenelle Rd  
 Dubuque, IA 52002

**Toll Free: 1-800-292-2737**  
 sales@aymcdonald.com  
 aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

**Submitted by:**