
# SUBMITTAL DATA SHEET

**Irrigation & Booster Pumps** Sprinkler Pump | E-Series

## 89000 Series I Self-Priming Sprinkler Pump



A.Y. McDonald's E-Series Sprinkler Pump is designed with a 1 1/2" inlet and outlet with a flow of up to 85 GPM. With an easy switch between 115V and 230V and a 304 stainless steel insert on the impeller, this high quality pump also contains a stainless steel wear ring between the impeller and diffuser. The E-Series Sprinkler Pump is available in 1, 1 1/2, and 2 HP and comes with a reliable, robust, and tested motor.

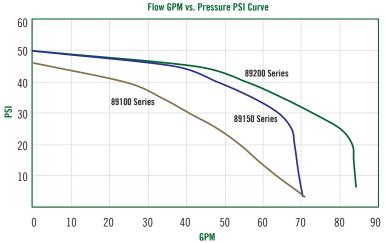

		N
		F
70	80	90

# 3.19

### Models Available

Part No.	Model No.	HP	Volts	Amps	Pipe Sizes Suction Discharge		Ship WT. (lbs.)
6156-134	89100	1	115 / 230	16.6 / 8.3	1 1/2"	1 1/2"	59
6156-135	89150	1 1/2	115 / 230	21 / 10.5	1 1/2"	1 1/2"	63
6156-136	89200	2	230	11.8	1 1/2"	1 1/2"	64

### Performance

Model No.	HP	Suction Lift - FT.	Capacitie 10	es in GPM a 20	nt Discharg 30	e Pressure 40	Max. Shut off PSI
		0	63	54	41	24	46.2
	1	5	61	51	38	19	44
00100		10	56	46	32		41.9
89100		15	51	44	28		39.7
		20	43	40	23		38.3
		25	35	34	18		34.8
		0	69	68	64	48	49.9
		5	62	61	58	42	46.7
89150	1 1/2	10	55	53	51	35	45
		15	48	48	46	26	44.2
		20	42	40	39	15	43.8
		25	34	34	30		41.4
89200	2	0	83	83	73	54	50
		5	73	73	69	49	48
		10	57	57	56	39	48
		15	50	50	50	34	43.8
		20	42	42	42	22	45.1
		25	34	34	34		39.4

### SUBMITTAL INFORMATION

- Up to 85 GPM
- 1 1/2" Inlet & outlet
- Reliable, robust, and tested motor
- Easy to switch between 115V & 230V (Factory preset to 230V)
- 2 HP Sprinkler pump 230V Only

- 304 Stainless steel motor shaft with wrench flat
- All iron pump housing and seal plate
- 304 Stainless steel insert on impeller
- Stainless steel wear ring between the impeller & diffuser
- Stainless steel bolt hardware connecting pump to motor

NO-LEAD: The weighted average of the wetted surface of this no-lead product contacted by consumable water contains less than one quarter of one percent (0.25%) lead.



A.Y. McDonald Mfg. Co. 4800 Chavenelle Rd Dubuque, IA 52002

Toll Free: 1-800-292-2737 sales@aymcdonald.com aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

**Submitted by:**