
## **SUBMITTAL DATA SHEET**

## SS Strap Saddle - 73876F





			_	-	_	_			PVC
MODEL	SIZE	A	В	С	D	E	F	G	TYPE
73876F	4 X 3/4	3/4	3.19	3.29	1.69	DCT	4.80	3.00	C900
73876F	4 X 1	1	3.19	3.29	1.69	DCT	4.80	3.00	C900
73876F	4 X 1 1/4	1 1/4	3.19	4.19	3.45	DCT	4.80	3.00	C900
73876F	4 X 1 1/2	1 1/2	3.19	4.19	3.45	DCT	4.80	3.00	C900
73876F	4 X 2	2	3.19	4.19	3.45	DCT	4.80	3.00	C900
73876F	6 X 3/4	3/4	3.19	3.29	1.69	DCT	6.90	3.00	C900
73876F	6 X 1	1	3.19	3.29	1.69	DCT	6.90	3.00	C900
73876F	6 X 1 1/4	1 1/4	3.19	4.19	3.45	пст	6.90	3.00	E900
73876F	6 X 1 1/2	1 1/2	3.19	4.19	3.45	OCT	6.90	3.00	E900
73876F	6 X 2	2	3.19	4.19	3.45	OCT	6.90	3.00	C900
73876F	8 X 3/4	3/4	3.19	3.29	1.69	DCT	9.05	3.00	C900
73876F	8 X 1	1	3.19	3.29	1.69	DCT	9.05	3.00	C900
73876F	8 X 1 1/4	1 1/4	3.19	4.19	3.45	DCT	9.05	3.00	C900
73876F	8 X 1 1/2	1 1/2	3.19	4.19	3.45	ОСТ	9.05	3.00	C900
73876F	8 X 2	2	3.19	4.19	3.45	DCT	9.05	3.00	C900
73876F	10 X 3/4	3/4	3.19	3.29	1.69	DCT	11.10	3.48	C900
73876F	10 X 1	1	3.19	3.29	1.69	DCT	11.10	3.48	C900
73876F	10 X 1 1/4	1 1/4	3.19	4.19	3.45	DCT	11.10	3.48	C900
73876F	10 X 1 1/2	1 1/2	3.19	4.19	3.45	ОСТ	11.10	3.48	C900
73876F	10 X 2	2	3.19	4.19	3.45	DCT	11.10	3.48	C900
73876F	12 X 3/4	3/4	3.19	3.29	1.69	DCT	13.20	3.48	C900
73876F	12 X 1	1	3.19	3.29	1.69	DCT	13.20	3.48	C900
73876F	12 X 1 1/4	1 1/4	3.19	4.19	3.45	ОСТ	13.20	3.48	C900
73876F	12 X 1 1/2	1 1/2	3.19	4.19	3.45	DCT	13.20	3.48	C900
73876F	12 X 2	2	3.19	4.19	3.45	DCT	13.20	3.48	C900

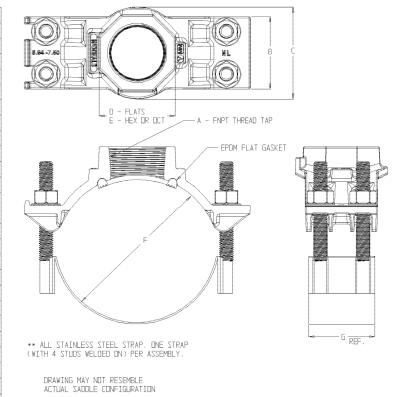

## SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- 304L Stainless Steel strap(s) and studs. Stainless steel nuts (PTFE coated) and washers
- EPDM o-ring
- Pipe and tap size, and thread type identified on saddle
- Outlet boss with large wrench flats



**A.Y. McDonald Mfg. CO.** 4800 Chavenelle Rd Dubuque, IA 52002

Toll Free: 1-800-292-2737 sales@aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: 05-20