
SUBMITTAL DATA SHEET

NL Ball Style Corporation Stop – 74104BP



MNPT x MNPT

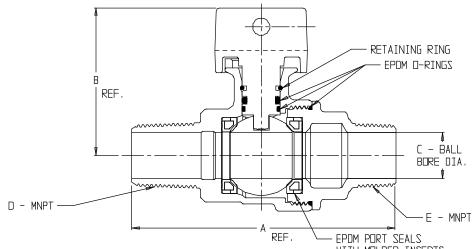

WITH MOLDED INSERTS

MODEL	SIZE	А	В	С	D	E
74104BP	3/4	4.33	2.42	.75	3⁄4	3/4
74104BP	1	5.08	2.65	1.00	1	1
74104BP	1 1/2	6.42	3.40	1.50	1 1/2	1 1/2
74104BP	2	7.50	3.71	2.00	2	2

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- PTFE coated brass ball rotates 90°
- Valve rated for 300 PSIG water pressure, end connections not to exceed rated pipe pressure.
- Blow out proof EPDM port seals
- End piece joint sealed with an EPDM o-ring and thread locker



A.Y. McDonald Mfg. Co. 4800 Chavenelle Rd Dubuque, IA 52002 **Toll Free:** 1-800-292-2737 sales@aymcdonald.com <u>aymcdonald.com</u>

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: