


# SUBMITTAL DATA SHEET

NL Service Fitting – 74755-3G

-3G PEP Compression x Female Copper Flare

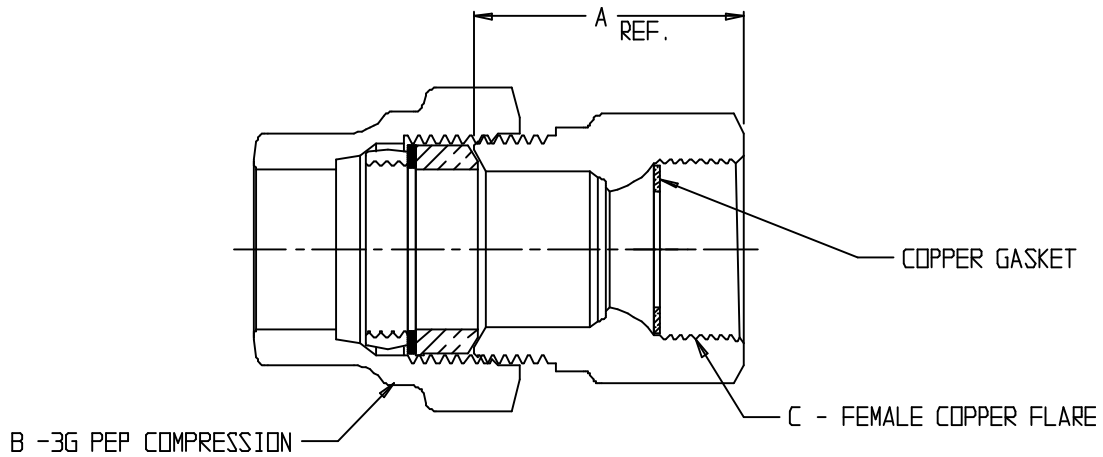

| MODEL    | SIZE      | A    | B   | C     |
|----------|-----------|------|-----|-------|
| 74755-3G | 3/4       | 1.88 | 3/4 | 3/4   |
| 74755-3G | 1         | 2.17 | 1   | 1     |
| 74755-3G | 1 X 3/4   | 1.93 | 1   | 3/4   |
| 74755-3G | 1 X 1 1/4 | 2.20 | 1   | 1 1/4 |

## SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with “NL”
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- Large wrench flats provided for proper installation
- Insert stiffeners required for all flexible plastic connections



**A.Y. McDonald Mfg. Co.**  
4800 Chavenelle Rd  
Dubuque, IA 52002

**Toll Free: 1-800-292-2737**  
sales@aymcdonald.com  
[aymcdonald.com](http://aymcdonald.com)

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

**Submitted by:**