


SUBMITTAL DATA SHEET

NL Service Fitting – 74755DBL

Copper Flare x Female Copper Flare with Dielectric Bushing

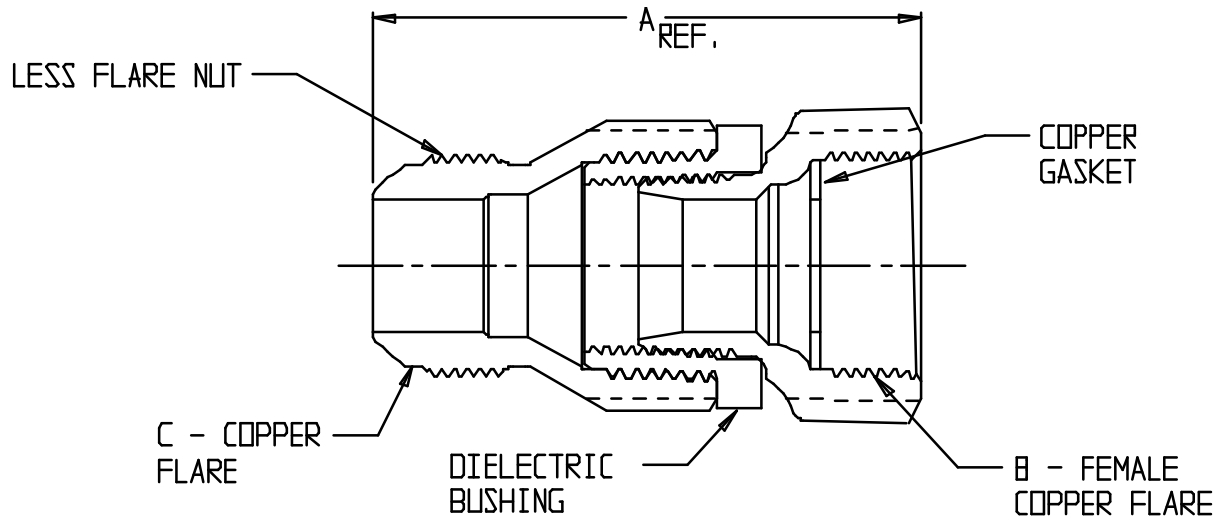

NOTE: ACTUAL LENGTHS WILL VARY DUE TO ASSEMBLY OF INSULATOR.

MODEL	SIZE	A	B	C
74755DBL	3/4	3.33	3/4	3/4
74755DBL	1	3.70	1	1
74755DBL	1 1/2	5.72	1 1/2	1 1/2
74755DBL	2	6.79	2	2

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with “NL”
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- Large wrench flats provided for proper installation



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: