
SUBMITTAL DATA SHEET

NL Service Fitting – 74758-3G-55



-3G PEP Compression x -55 IP Compression

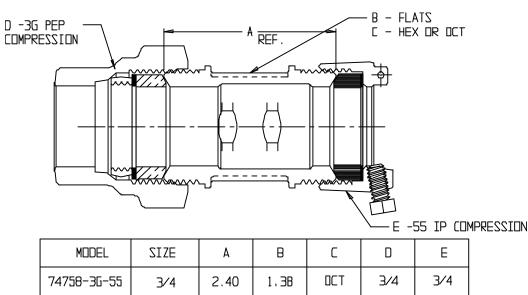

74758-36-55	3⁄4	2.40	1 . 3B	OCT	3/4	3⁄4
74758-36-55	3∕4 X 2*	2,96	3.05	DCT	3/4	2
74758-3G-55	l	2,56	1.69	DCT	1	1
74758-36-55	1 X 3⁄4	2.61	1.85	OCT	1	3/4

NDTE - * HAS 2 SCREWS ON THE -55 NUT

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with "NL"
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- Large wrench flats provided for proper installation
- Insert stiffeners required on all flexible plastic connections



A.Y. McDonald Mfg. Co. 4800 Chavenelle Rd Dubuque, IA 52002 **Toll Free:** 1-800-292-2737 sales@aymcdonald.com <u>aymcdonald.com</u>

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: