


SUBMITTAL DATA SHEET

NL Service Fitting – 74764G

G CTS Compression x G CTS Compression x FNPT

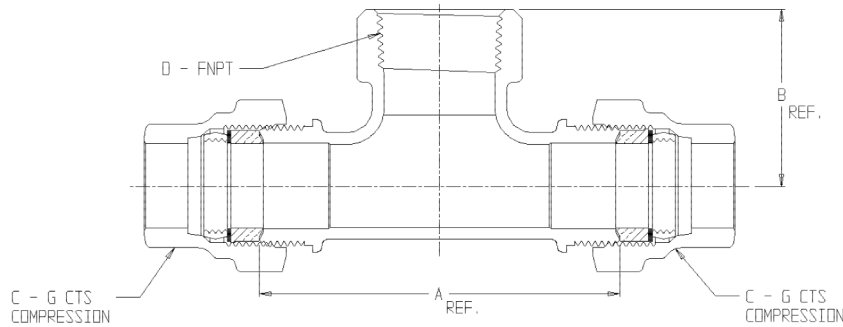

MODEL NO.	SIZE	A	B	C	D
74764G	3/4	3.12	1.61	3/4	3/4
74764G	3/4 X 1	3.76	1.84	3/4	1
74764G	1 X 3/4	3.56	1.75	1	3/4
74764G	1	3.52	1.76	1	1
74764G	1 X 1 1/4	4.36	2.25	1	1 1/4
74764G	1 X 1 1/2	4.36	2.25	1	1 1/2
74764G	1 1/4	4.20	2.18	1 1/4	1 1/4
74764G	1 1/4 X 3/4	4.54	2.06	1 1/4	3/4
74764G	1 1/4 X 1	4.54	2.06	1 1/4	1
74764G	1 1/2 X 3/4	4.54	2.06	1 1/2	3/4
74764G	1 1/2 X 1	4.54	2.06	1 1/2	1
74764G	1 1/2	4.24	2.17	1 1/2	1 1/2
74764G	2 X 3/4	4.00	2.34	2	3/4
74764G	2 X 1	4.00	2.34	2	1
74764G	2 X 1	5.02	2.57	2	2

SUBMITTAL INFORMATION

- Manufactured in compliance with ANSI/AWWA C800 (latest revision)
- Brass components in contact with potable water conform to ASTM B584, UNS C89833 (latest revision) and identified with “NL”
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Brass components not in contact with potable water conform to ASTM B62 and ASTM B584, UNS C83600 -85-5-5-5 (latest revision)
- Large wrench flats provided for proper installation
- Insert stiffeners required on all flexible plastic connections



A.Y. McDonald Mfg. Co.
4800 Chavenelle Rd
Dubuque, IA 52002

Toll Free: 1-800-292-2737
sales@aymcdonald.com
aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: